PHANTOM 4 ADVANCED+

Quick Start Guide

V1.0






Phantom 4 Advanced+

The DJI™ PHANTOM™ 4 Advanced+ is a smart prosumer flying camera capable of shooting 4K video at 60fps and at up to 100mbps, and capturing 20 megapixel stills. Using upgraded TapFly™ and ActiveTrack™ through the DJI GO™ 4 app, you can fly anywhere visible on your screen or track a moving subject smoothly and easily with a simple tap. The brand new camera uses a 1-inch CMOS sensor offering unprecedented clarity, lower noise, and better quality images.



- 1. Gimbal and Camera
- 2. Downward Vision System*
- 3. Micro USB Port
- Camera/Linking Status Indicator and Link Button
- 5. Camera Micro SD Card Slot
- 6. Forward Vision System
- 7. Front LEDs

- 8. Motors
- 9. Propellers
- 10. Aircraft Status Indicators
- 11 Antennas
- 12. Intelligent Flight Battery
- 13. Power Button
- 14. Battery Level Indicators




^{*} The Vision System is affected by surrounding conditions. Read the Disclaimer and Safety Guidelines and watch the tutorials in the DJI GO 4 app or on the official DJI website to learn more.


Remote Controller

The powerful remote controller of the Phantom 4 Advanced+ has a transmission range extending up to 4.3 mi (7 km)*. It features physical buttons and dials to control exposure, camera tilt, photo capture and video recording.

Built into the remote controller is DJI LIGHTBRIDGE™, providing a live HD view from the Phantom camera directly on the display. An internal battery ensures a long battery life and ease of use.

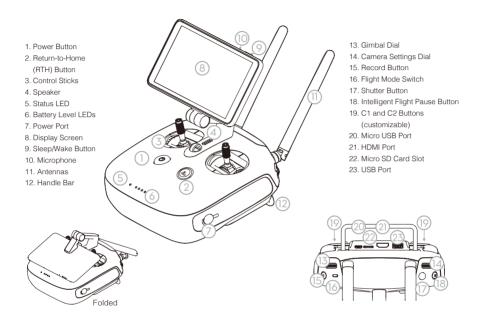

The default flight control is known as Mode 2. The left stick controls the aircraft's altitude and heading, while the right stick controls its forward, backward, left and right movements. The gimbal dial controls the camera's tilt.

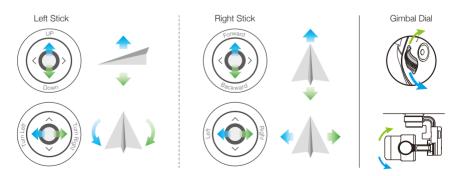

^{*} The remote controller is able to reach its maximum transmission distance (FCC) in a wide open area with no Electro-Magnetic Interference, and at an altitude of about 400 feet (120 meters).


1. Watch the Tutorial Videos

Watch the tutorial videos at www.dji.com or in the DJI GO 4 app.




Tutorial Videos

2. Check the Battery Levels

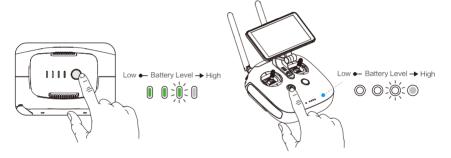

Press once to check the battery level. Press once, then again and hold to turn on/off.

3. Charge the Batteries

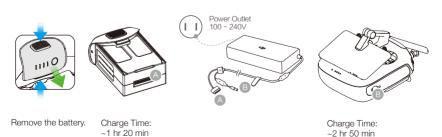



4. Prepare the Remote Controller



5. Prepare for Takeoff



Remove the gimbal clamp from the camera.

Power on the remote controller and the aircraft.

Complete first-time setup in DJI GO 4 and tap GO FLY.



First-time activation requires your DJI account and internet connection.







Press the propeller down onto the mounting plate and rotate in the lock direction (a) until secure.



Silver propeller rings go on motors without black dots.





. Check that the propellers are secure before each flight.

6. Flight

Ready to Go (GPS)

Before taking off, make sure the Aircraft Status Bar in the DJI GO 4 app indicates 'Ready to Go (GPS)' or 'Ready to Go (Vision)' if flying indoors.

In the DJI GO 4 App:



Auto Takeoff

The aircraft will take off and hover at an altitude of 4 feet (1.2 meters).



Auto Landing

The aircraft will land vertically and stop its motors



Return-to-Home (RTH)

Bring the aircraft back to the Home Point. Tap again to stop the procedure.



Normal

You are in control of the Phantom, with satellite and Return-to-Home support.



TapFly

Tap on your screen to fly your Phantom in that direction, avoiding obstacles as it flies.



ActiveTrack

Mark an object on your screen to track it as it moves.



- Watch the tutorial in the DJI GO 4 app or on the official DJI website to learn more.
- Always set an appropriate RTH altitude before takeoff. When the aircraft is returning to the Home Point, you should
 guide it with the control sticks. Refer to the Disclaimer and Safety Guidelines for more details.

Manual Takeoff







Combination Stick Command

to start/stop the motors







Manual Landing



Left stick down (slowly) until you touch the ground

Hold a few seconds to stop the motors



- Rotating propellers can be dangerous. Do not start the motors when there are people nearby.
- Always keep your hands on the remote controller so long as the motor is still spinning.
- Stop motor mid-flight: Pull the left stick to the bottom inside corner while simultaneously pressing the RTH button. Only stop motors mid-flight in emergency situations when doing so can reduce the risk of damage or injury. Refer to the user manual for details.



Stop motor mid-flight



It's important to understand basic flight guidelines, for the safety of both you and those around you. Don't forget to read the Disclaimer and Safety Guidelines.



Specifications

Aircraft

Weight (Battery & Propellers Included) 1368 g

Max Ascent Speed S-mode: 6 m/s; P-mode: 5 m/s Max Descent Sneed S-mode: 4 m/s; P-mode: 3 m/s

Max Speed 45 mph (72 kph) (S-mode); 36mph (58 kph) (A-mode); 31 mph (50 kph) (P-mode)

Max Service Ceiling Above Sea Level 19685 ft (6000 m) Approx. 30 minutes Max Flight Time Operating Temperature 32° to 104° F (0° to 40° C) Satellite Positioning Systems GPS/GLONASS

Hover Accuracy Range Vertical: ±0.1 m (With Vision Positioning); ±0.5 m (With GPS Positioning) Horizontal: ±0.3 m (With Vision Positioning); ±1.5 m (With GPS Positioning)

Gimbal

Controllable Range Pitch: -90° to +30°

Vision System

Velocity Range ≤31 mph (50 kph) at 6.6 ft (2 m) above ground

Altitude Range 0 - 33 ft (0 - 10 m) Operating Range 0 - 33 ft (0 - 10 m) Obstacle Sensory Range 2 - 98 ft (0.7 - 30 m)

Operating Environment Surfaces with clear patterns and adequate lighting (> 15 lux) Camera

Sensor

1" CMOS; Effective pixels: 20M

Lens FOV (Field of View) 84°, 8.8 mm (35 mm format equivalent: 24 mm), f/2.8 - f/11, auto focus at 1 m - ∞ ISO Range Video: 100 - 3200 (Auto); 100 - 6400 (Manual); Photo: 100 - 3200 (Auto); 100 - 12800 (Manual)

Mechanical Shutter 8 - 1/2000 s Electronic Shutter 8 - 1/8000 s

Max Image Size 3:2 Aspect Ratio: 5472×3648; 4:3 Aspect Ratio: 4864×3648; 16:9 Aspect Ratio: 5472×3078 Still Photography Modes Single Shot

Burst Shooting: 3/5/7/10/14 frames

Auto Exposure Bracketing (AEB): 3/5 bracketed frames at 0.7EV Bias

Interval: 2/3/5/7/10/15/30/60 s

Video Recording Modes H 265 •C4K: 4096×2160 24/25/30p

•C4K: 4096×2160 24/25/30/48/50/60p •4K: 3840×2160 24/25/30p ·4K: 3840×2160 24/25/30/48/50/60p ·2.7K: 2720×1530 24/25/30/48/50/60p ·2.7K: 2720×1530 24/25/30/48/50/60p •FHD: 1920×1080 24/25/30/48/50/60/120p •FHD: 1920×1080 24/25/30/48/50/60/120p •HD: 1280×720 24/25/30/48/50/60/120p •HD: 1280×720 24/25/30/48/50/60/120p

Video Storage Bitrate 100 Mhns

Supported File Systems FAT32 (≤ 32 GB); exFAT (> 32 GB) Photo JPEG, RAW (DNG), JPEG + RAW Video MP4/MOV (AVC/H.264; HEVC/H.265)

Supported SD Cards Micro SD, Max Capacity: 128 GB. Class 10 or UHS-1 rating required 32° to 104° F (0° to 40° C)

Operating Temperature

Remote Controller

Operating Frequency 2.400 - 2.483 GHz

FCC: 4.3 mi (7 km); CE: 2.2 mi (3.5 km); SRRC: 2.5 mi (4 km) (Unobstructed, free of interference) Max Transmission Distance

Operating Temperature 32° to 104° F (0° to 40° C)

Battery 6000 mAh LiPo 2S

Transmitter Power (EIRP) 26 dBm (FCC); 17 dBm (CE); 20 dBm (SRRC) Operating Voltage 124@74\

Built-in Display Device

5.5 inch screen, 1920x1080, 1000 cd/m² Android system, 4G RAM + 16G ROM

 Charger Voltage Rated Power 100 W Intelligent Flight Battery (PH4-5870mAh-15.2V)

5870 mAh Canacity Voltage 15 2 V Battery Type LiPo 4S Energy 89 2 Wh Net Weight 468 g

Charging Temperature Range 41° to 104° F (5° to 40° C)

Max Charging Power 100 W





Download the user manual for more information: http://www.dji.com/phantom-4-adv







The terms HDMI and HDMI High-Definition Multimedia Interface and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

PHANTOM and DJI are trademarks of DJI. Copyright © 2017 DJI All Rights Reserved.

PHANTOM 4 ADVANCED+